ENGINEERING
YOUR SPRAY SOLUTION

KEY FACTS
ROTATING CLEANING NOZZLES
SPINNER 2

Series 5M1, 5M2, 5M3, 5M4

GENERAL INDUSTRY

Spinner 2 serie


- Hygienic welding design
- No joining gap or dead spaces
- High surface finish (outer ≤ Ra 0,4 µm and inner ≤ Ra 0,8 µm)
- Made entirely of stainless steel 1.4404 / 316L
- Suitable for high temperatures (250 °C ambient temperature)

NanoSpinner 2

MicroSpinner 2

MiniSpinner 2

MaxiSpinner 2

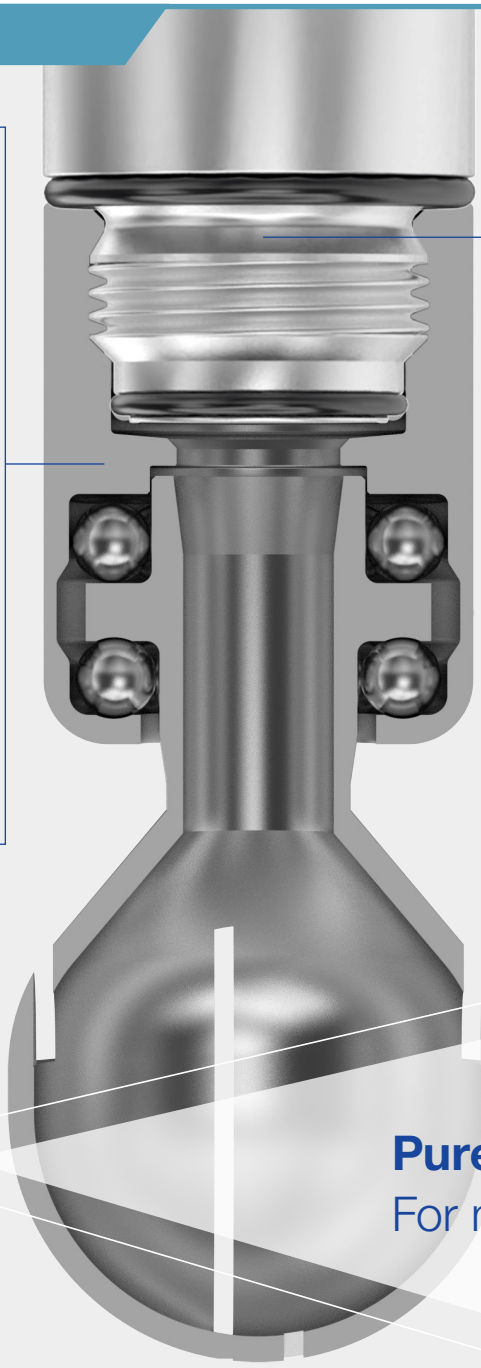

Perfect addition

HygienicFit

Advantages of the hygienic connection with the HygienicFit adapter

- Reliable encapsulated thread
- Thread locking by O-rings (EPDM)
- Adapter made of 1.4404 / 316L

Perfect addition and optimal accessories for the series MicroSpinner 2, MiniSpinner 2 and MaxiSpinner 2.

The NanoSpinner 2 is not compatible with the HygienicFit adapter.

FDA

Pure hygiene.
For many tank sizes.