ENGINEERING
YOUR SPRAY SOLUTION

KEY FACTS
ROTATING CLEANING NOZZLE POPUP

Series 5P7

GENERAL INDUSTRY

Pneumatically extendable PopUp nozzle for tank and equipment cleaning

Features

- Position indication by means of sensor (IO-link capable)
- Self-draining in almost any orientation
- Extendable independent of liquid pressure
- Flushable with air
- Installation flush with wall
- No additional installations in the process area



Series 5P7

FDA

Technical data:

Maximum operating temperature
95 °C

Maximum ambient temperature
65 °C

Flow rate
54 lpm at 2.5 bar


Recommended operating pressure
2.5 bar

Maintainable


Accessories

Retaining nut: 095.011.1Y.00.89
Weld-on nipple: 500.605.1Y.00.08

Installation example

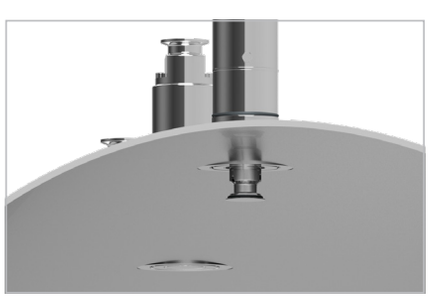

Spray distribution

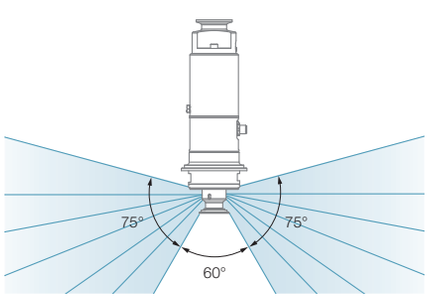

Lechler GmbH · Precision Nozzles · Nozzle Systems
Ulmer Straße 128 · 72555 Metzingen, Germany · Phone +49 7123 962-0 · info@lechler.de · www.lechler.com