ENGINEERING
YOUR SPRAY SOLUTION

BELT LUBRICATION NOZZLES MADE ENTIRELY FROM PLASTIC

Series 652

GENERAL INDUSTRY

The one-piece solid plastic nozzle from Lechler. A low cost nozzle alternative for belt lubrication.

Application
Belt lubrication, low flow cleaning or lubricating

Advantages
- Provides economical savings through mold injection process.
- Interchangeable with existing design components. (Nipple and locknut)

Connection
Assembly with 3/8“ retaining nut



Series 652.xxx.56.03



Spray angle	Ordering no.		Color	Narrowest cross section Ø [mm]	V̇ water [l/min]			
	Type	Mat.-No. 56.03 POM			p [bar]			
					1.0	2.0	**3.0**	5.0
75°	**652.145**	●	Green	0.12	0.04*	0.05	**0.06**	0.08
	652.185	●	Red	0.16	0.06*	0.08	**0.10**	0.13
	652.215	●	Blue	0.20	0.08*	0.11	**0.14**	0.18
	652.245	●	Orange	0.30	0.12*	0.16	**0.20**	0.26

* Differing spray pattern

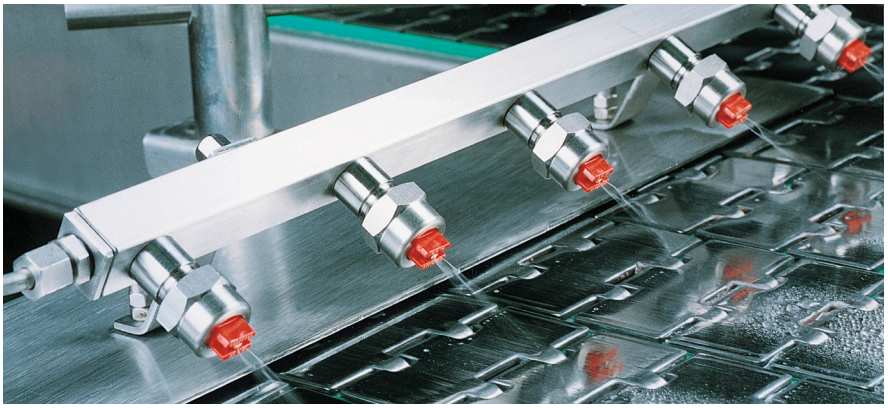

Lechler GmbH · Precision Nozzles · Nozzle Systems
Ulmer Strasse 128 · 72555 Metzingen, Germany · Phone +49 7123 962-0 · info@lechler.de · www.lechler.com

Edition 09/22 · EN · 500 · Subject to technical modification.